TO-252

Parameter	Symbol	Rating	Unit

ƒ Electrical Characteristic Curve

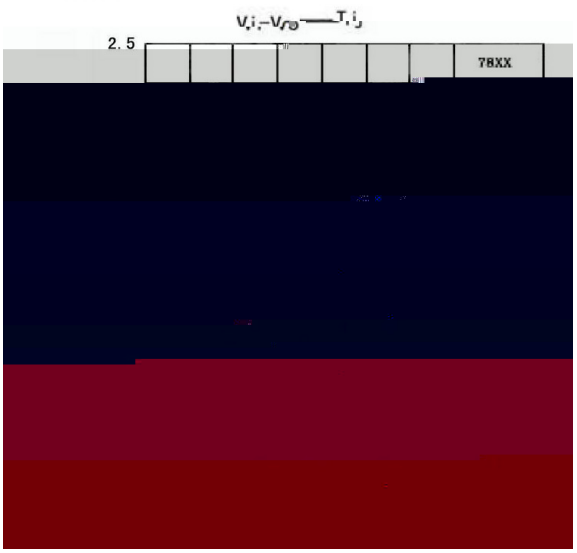

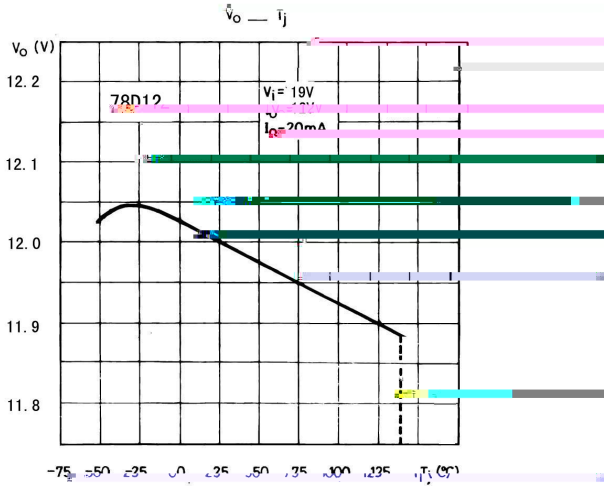

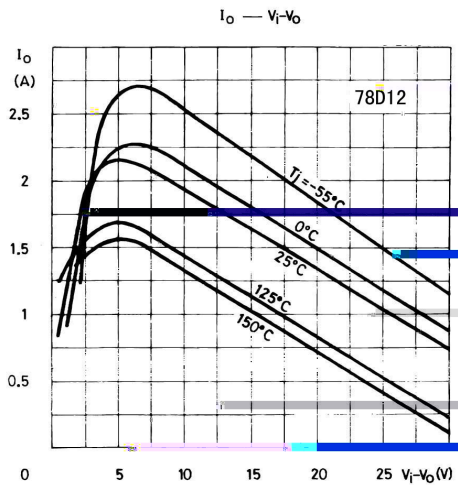

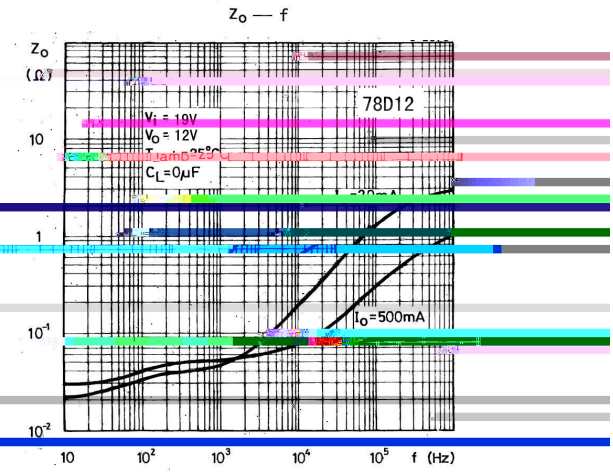

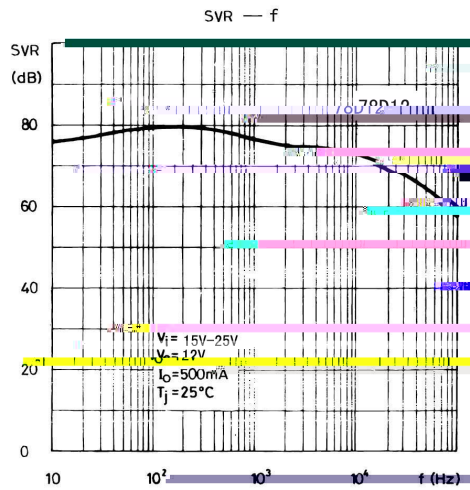

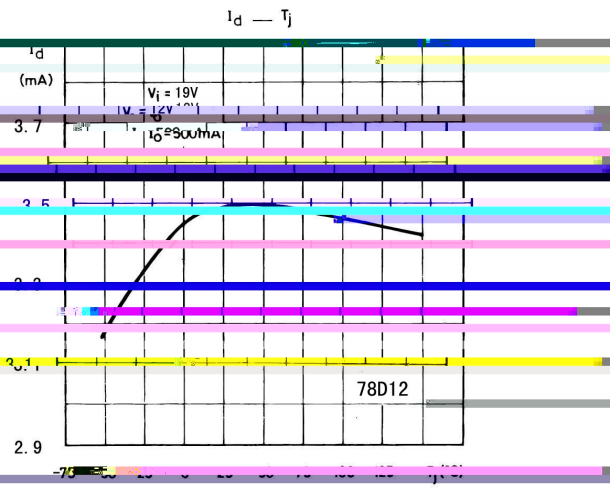

ᵘ ĖÒĻ ƒ / Package Dimensions

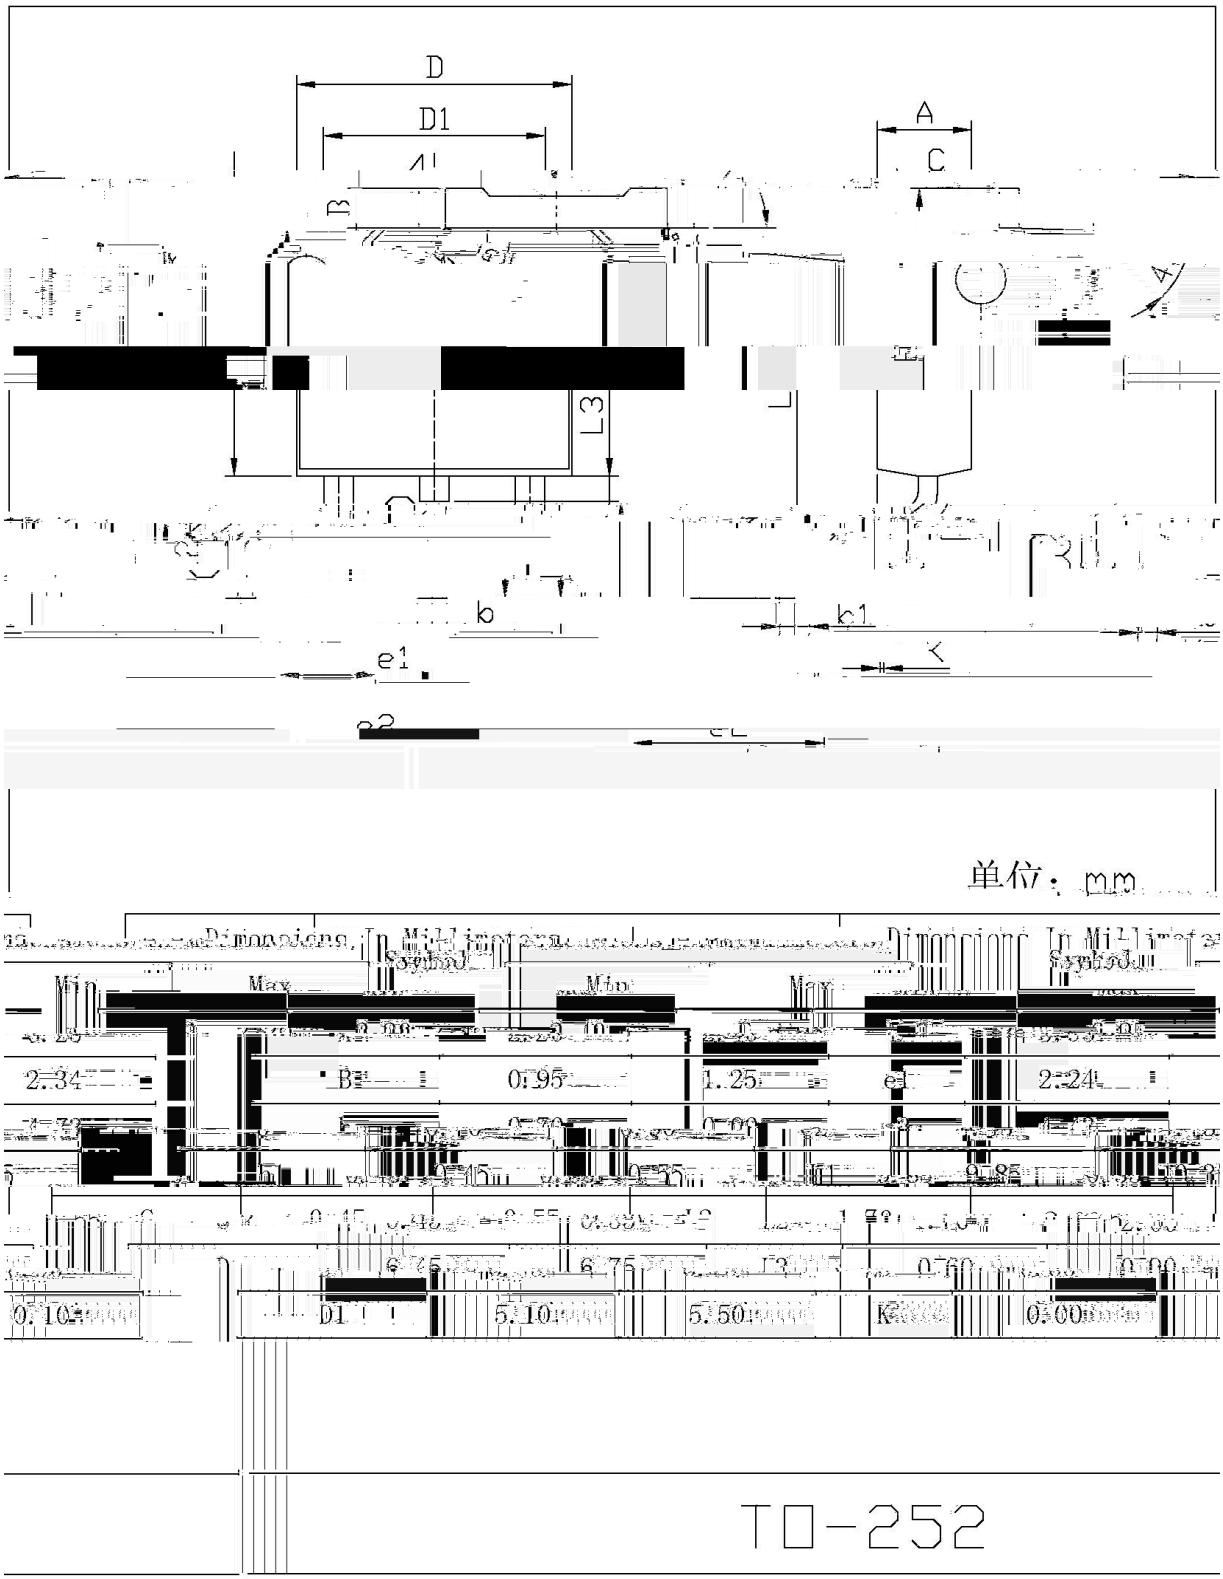

78D12

ȶ ʃ ╗ ẘ ´E ⅵ ƒ (ᾠ ᴗ) / Whp shudwxuh Suriloh iru LU Uhior z Vroghulqj+Se0luhh,

					Note:
1	150	180	60	90sec;	1.Preheating:150~180 , Time:60~90sec.
2	245	5	5	0.5sec;	2.Peak Temp.:245 5 , Duration:5 0.5sec.
3		2	10	/sec.	3. Cooling Speed: 2~10 /sec.

⅃ ȕ ɑ ˝ `Y Ţ / Resistance to Soldering Heat Test Conditions

260	5	10	1 sec.	Temp.:260±5	Time:10±1 sec

ɒ ᴇ ᴄ— / Packaging SPEC.

/ REEL