
BC856

/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(Ta=25)

						μ
		Ω				

/ Package Dimensions

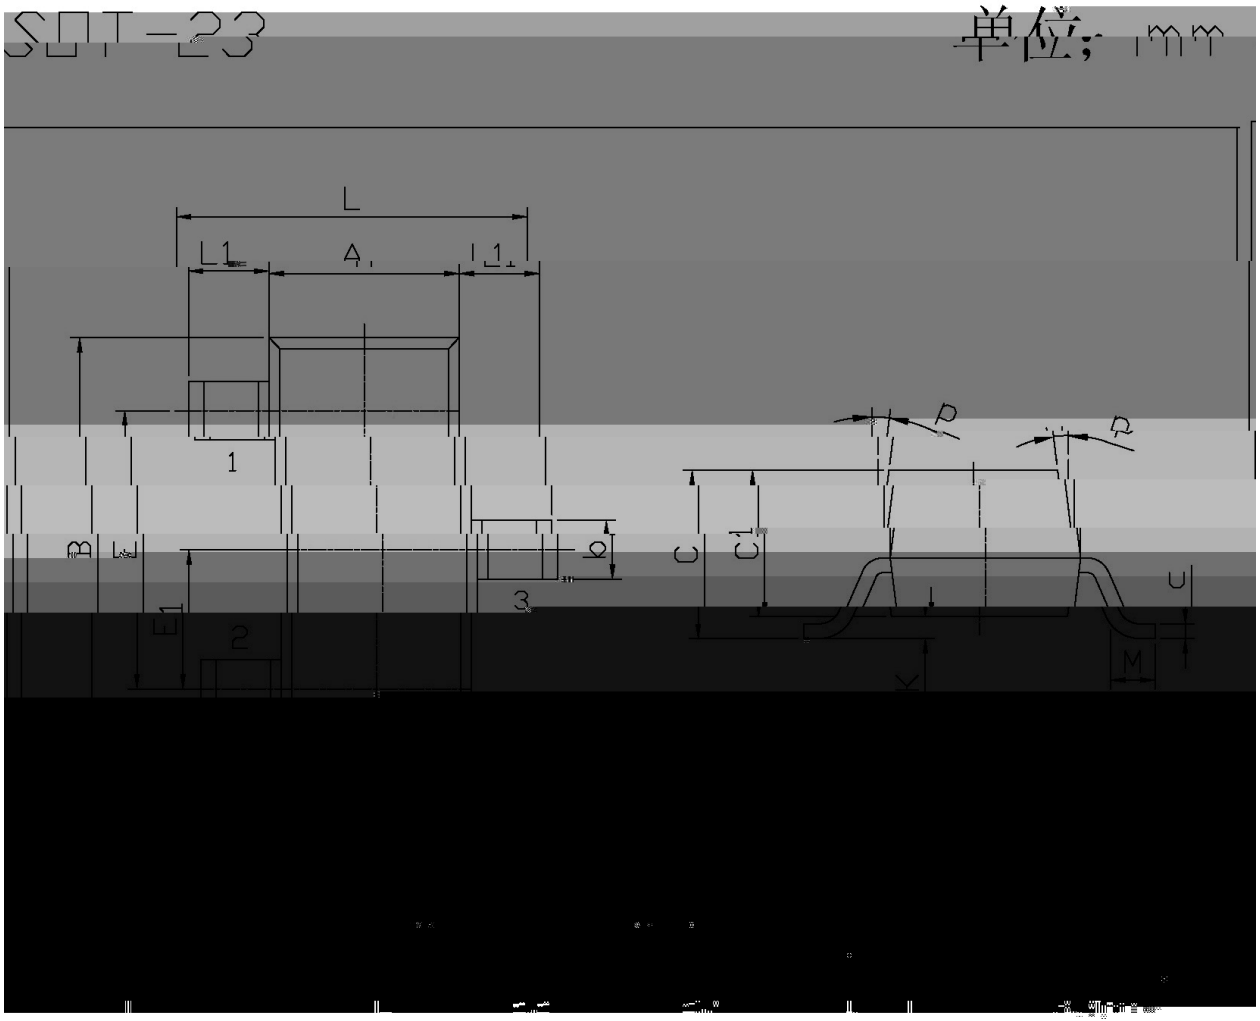


/ Marking Instructions

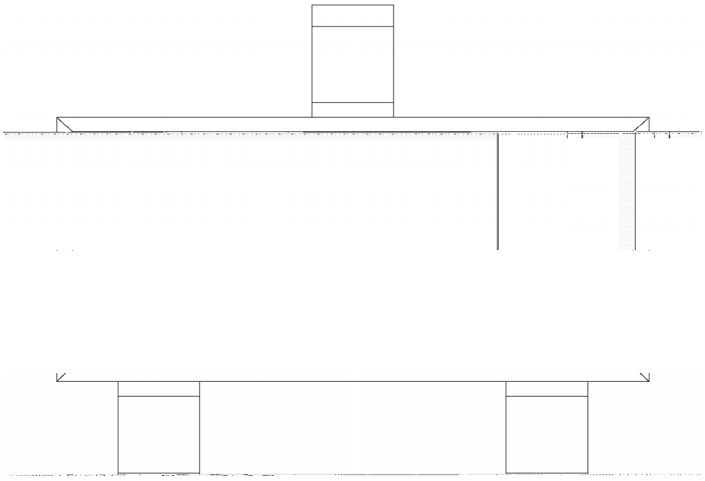

H

3A

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

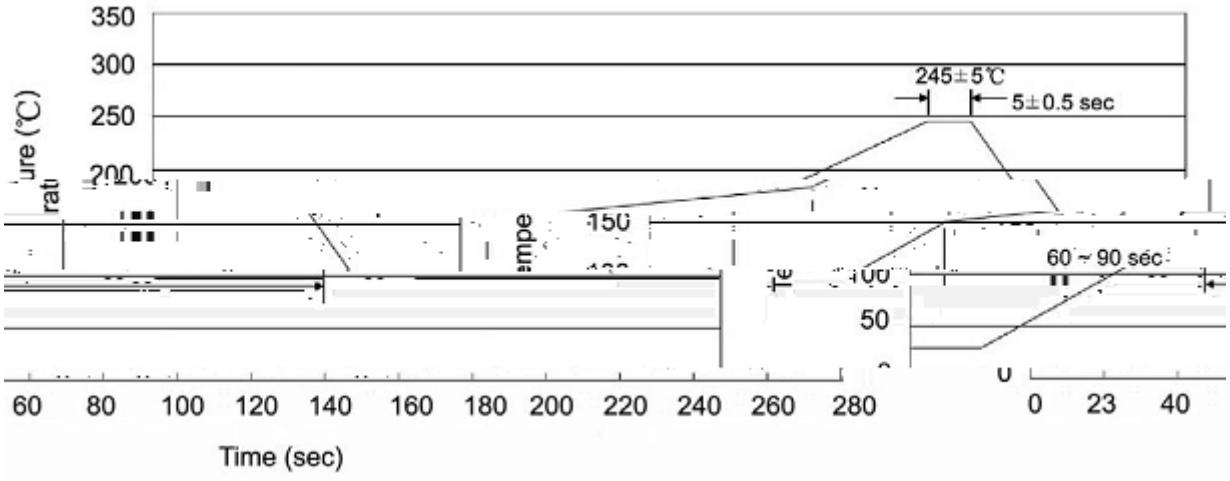

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices