
DC/DC








/ Absolute Maximum Ratings(Ta=25)

;)


/ Electrical Characteristic Curve

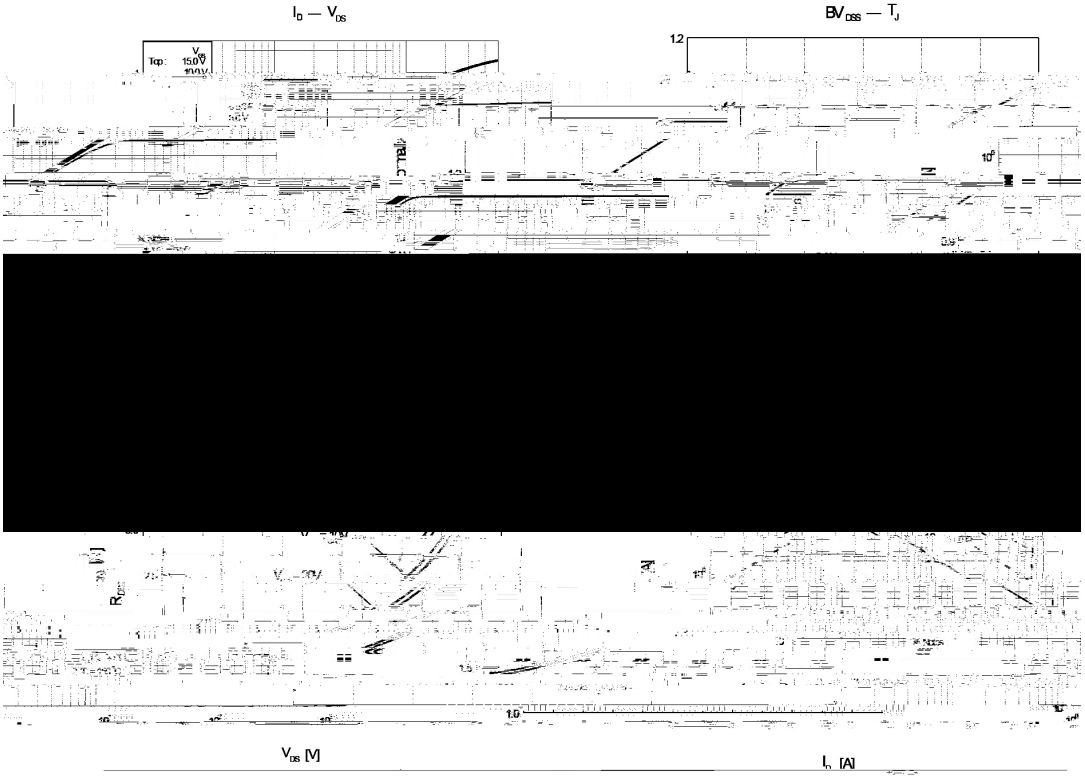

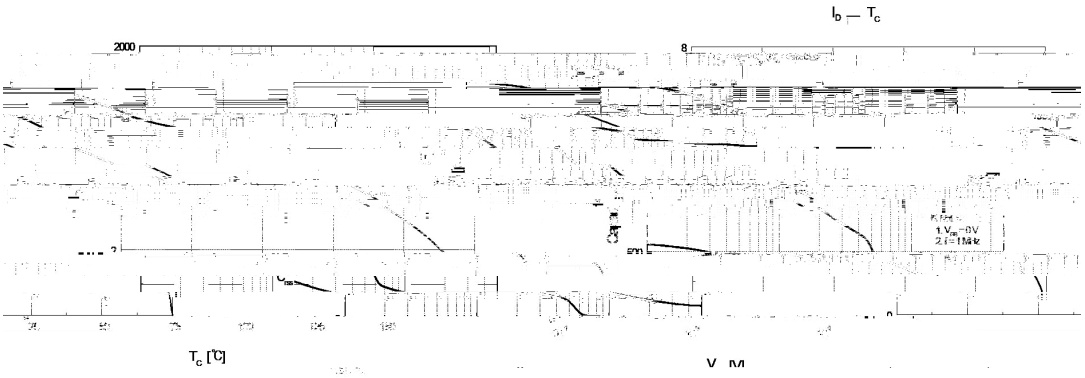


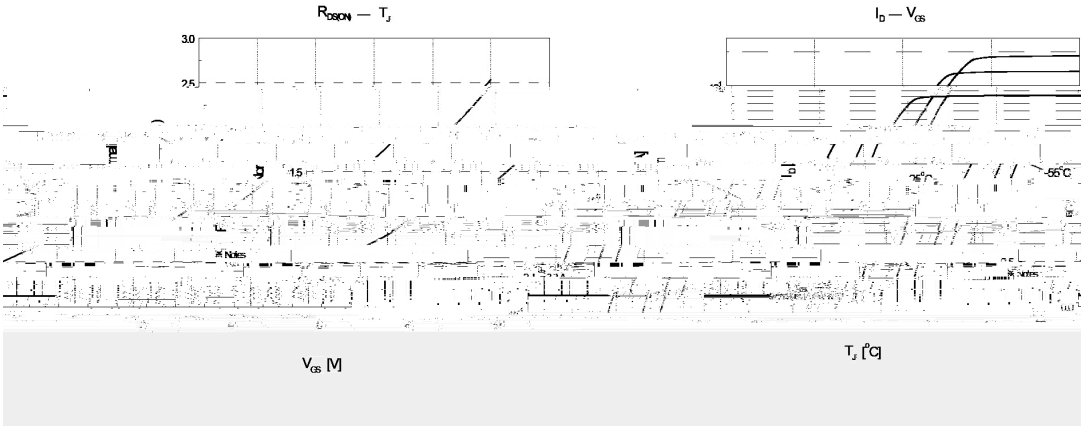

/ Package Dimensions

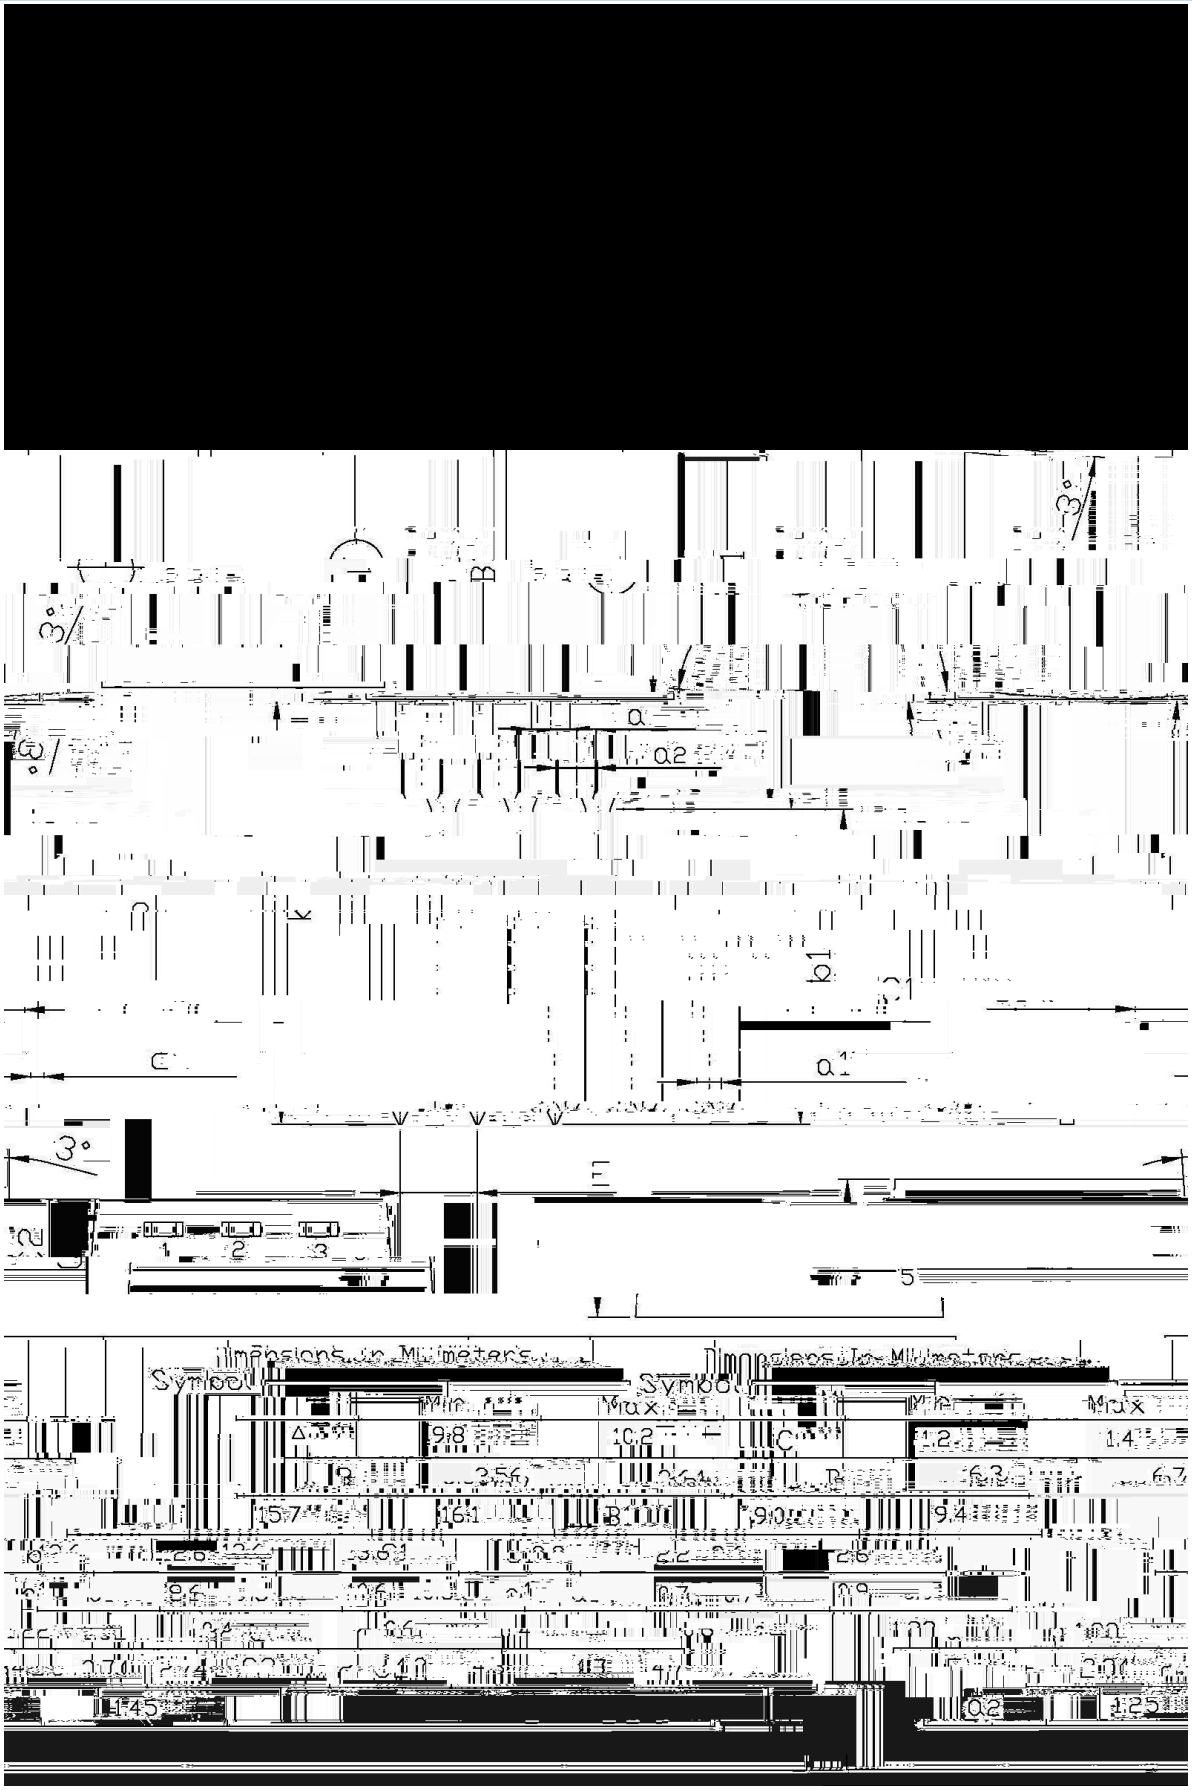


/ Marking Instructions

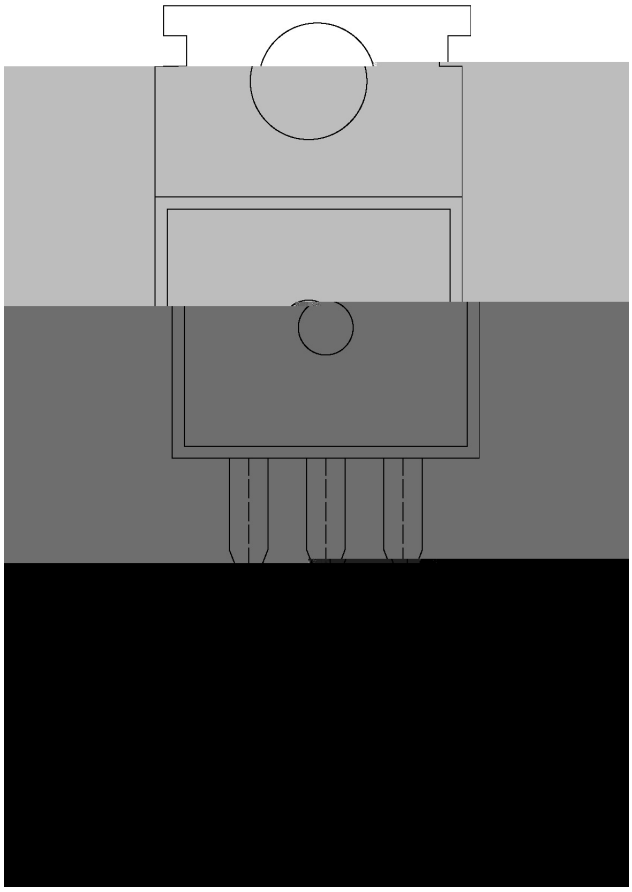

7N80

****

( ) / Temperature Profile for Dip Soldering(Pb-Free)

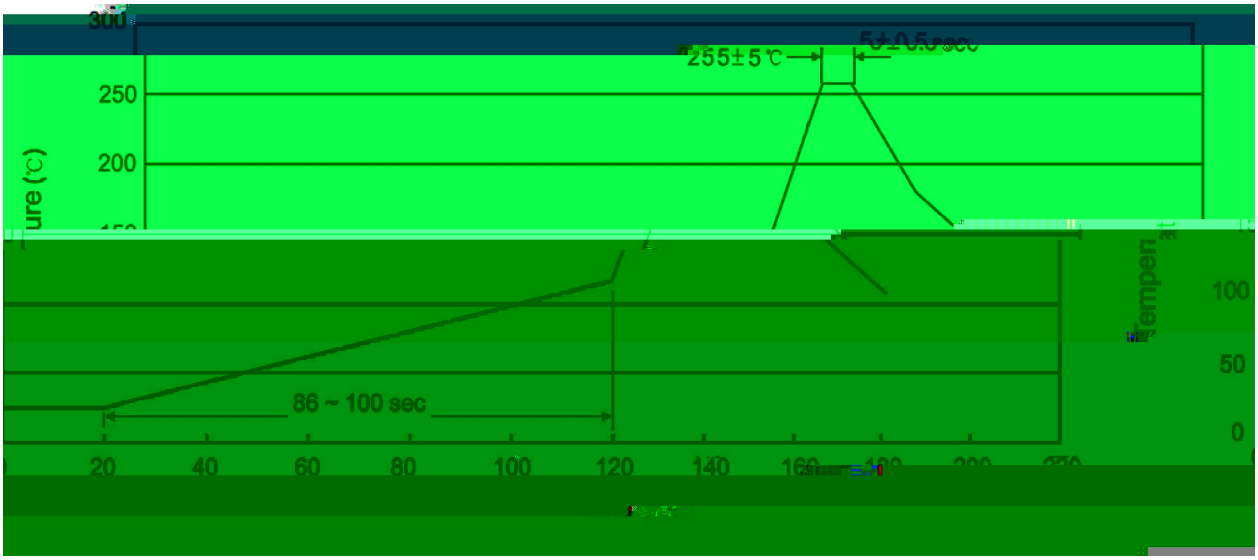

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±