WR0596 Ṃ Ṃ Ŀ ʌ ồ Ỡ ʉ͡ ǁ ˥

V ̈Ω̣ Parameter	ϒ N Symbol	̈Ω̣Ö Rating	D Ĥ Unit
Peak Repetitive Reverse Voltage	V_{RRM}	600	V
RMS Voltage	V_{RMS}	420	V
DC Blocking Voltage	V_{DC}	600	V
Maximum Average Forward Current	I_F	1 × 30	A
Peak forward surge current	I_{FSM}	300	A
Typical Thermal Resistance Junction to Case	$R_{\theta Jc}$	2.0	/W

/ Electrical Characteristic Curve

IF - TC

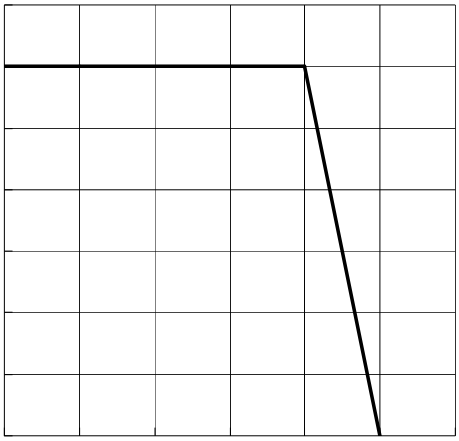

/ Package Dimensions

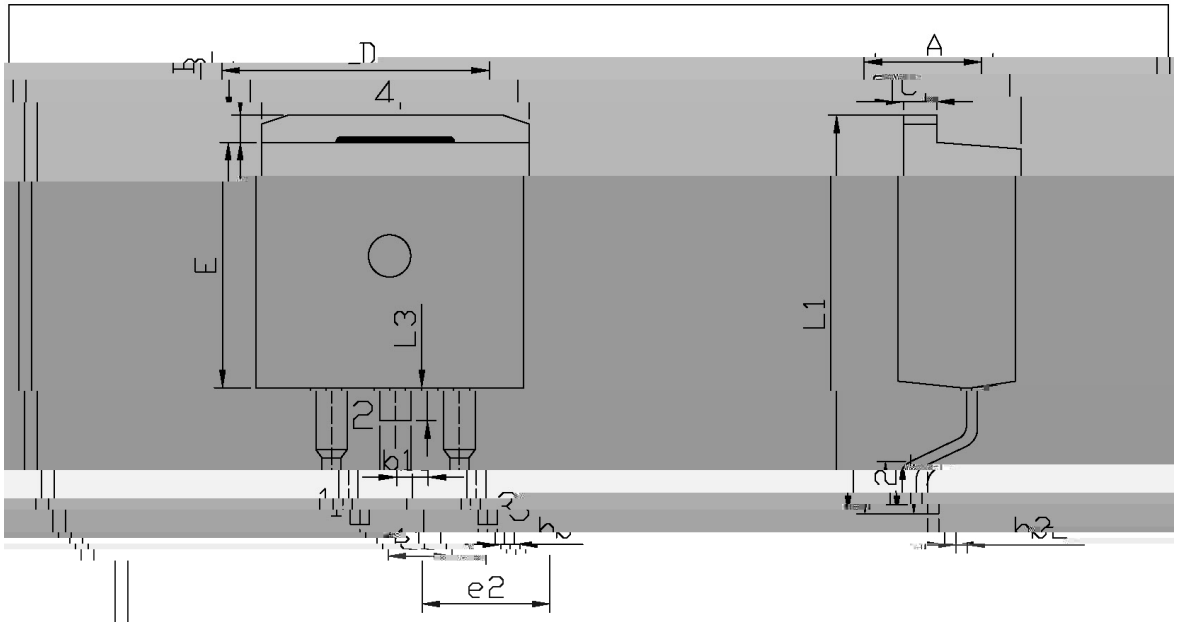

单位：mm

Dimensions In Millimeters		Dimensions In Millimeters	
Min	Max	Min	Max
A	4.30	4.70	E	9.00	9.40

/ Marking Instructions

ب ˝ χ

EU χ	ѭ ʒ ᴵ Ɱ
P XU6393 χ	ѭ ɾ ᵝ ʒ ᴺ
---- χ	ѭ ɨ ɾ ŋ̈ ᴺ Ɱ ɪ ɞ ɨ ɾ ŋ̈ ᴺ ᴹ ק

Note:

BR:	Company Code
MUR3060 χ	Product Type.
****:	Lot No. Code, code change with Lot No.