
00 2 0A SMA

Surface Mount Superfast Recovery Rectifier, Reverse Voltage:800V,Forward Current:2.0

Parameter	Symbol	Rating	Unit

0 8 9 = > ?

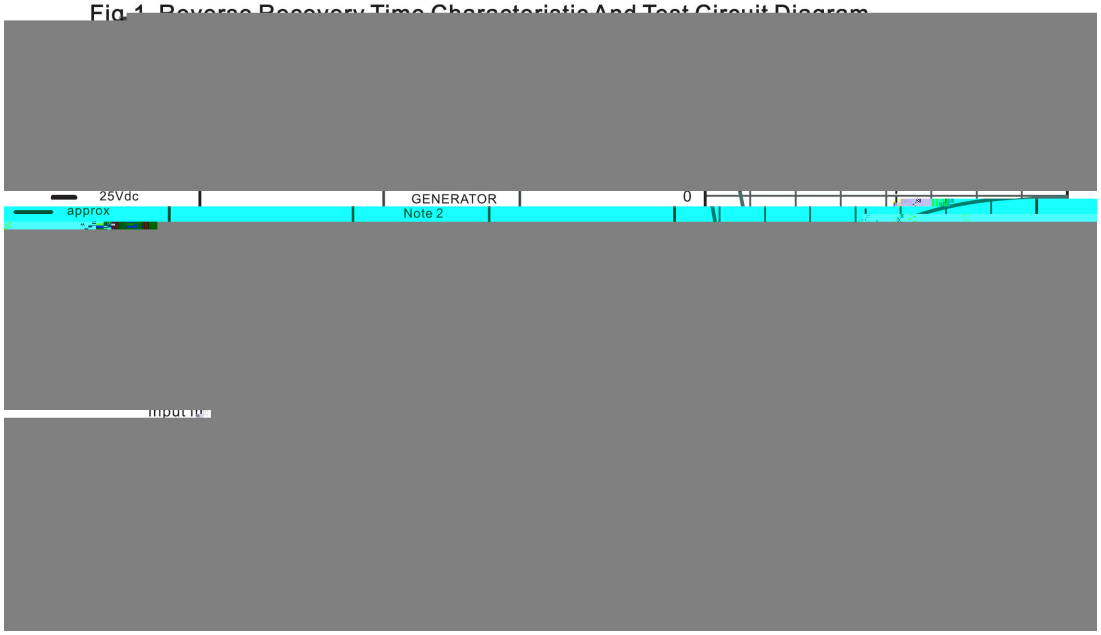



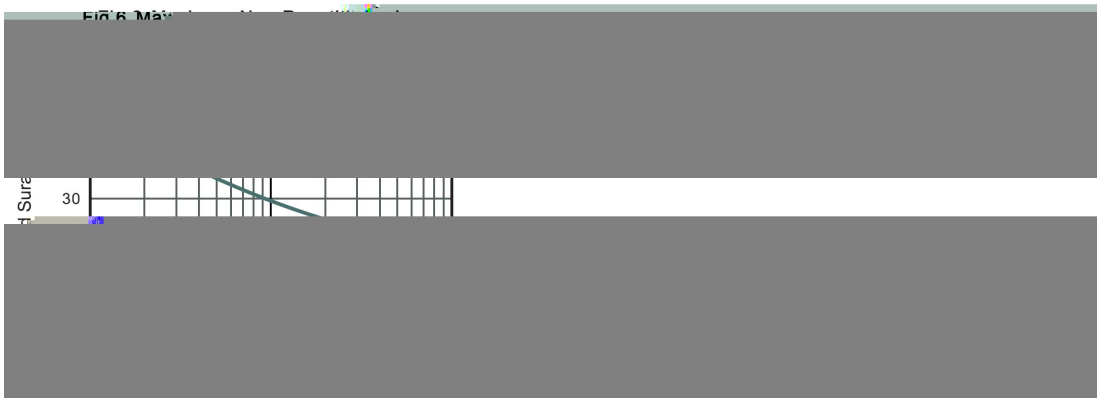

@A B C ?

SMA

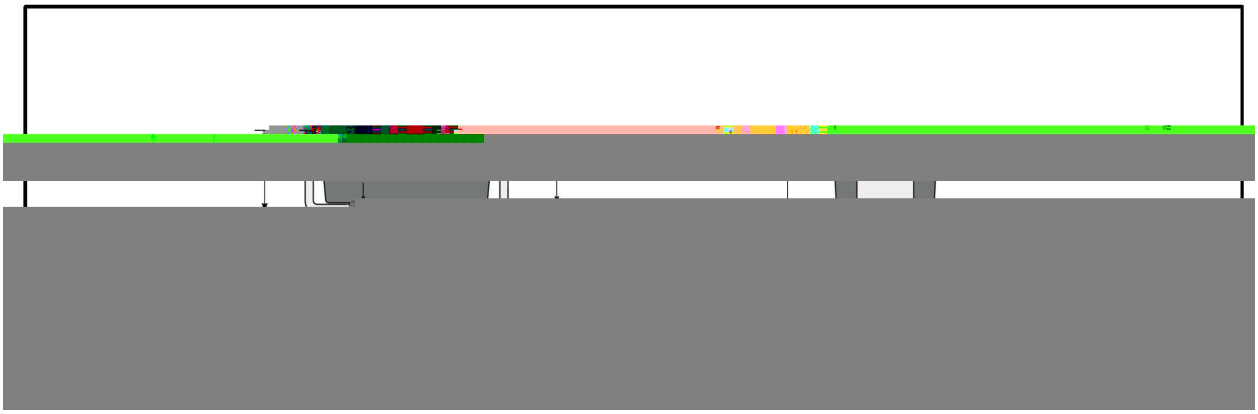

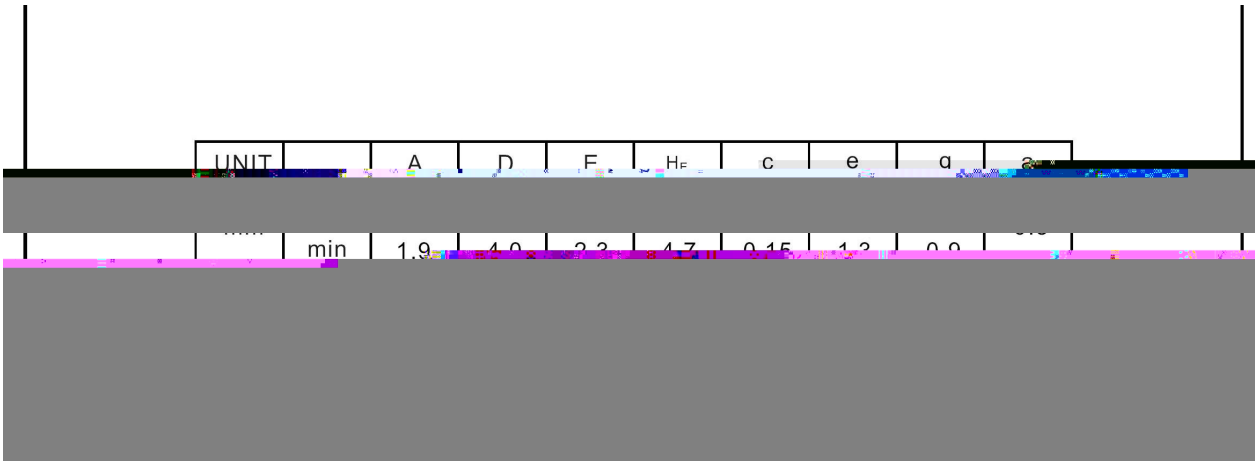

UNIT		A	D	E	H_E	c	e	q	a_{max}
	min	1.9	4.0	3.3	4.7	0.15	1.3	0.9	

Rev.A Mar.-2021

H I J K L = > ? M N OPQRPSTUVSPGWSXYZ[PGYXSG\]G]PY[X^G_X[`PSZabcWdefSPPg

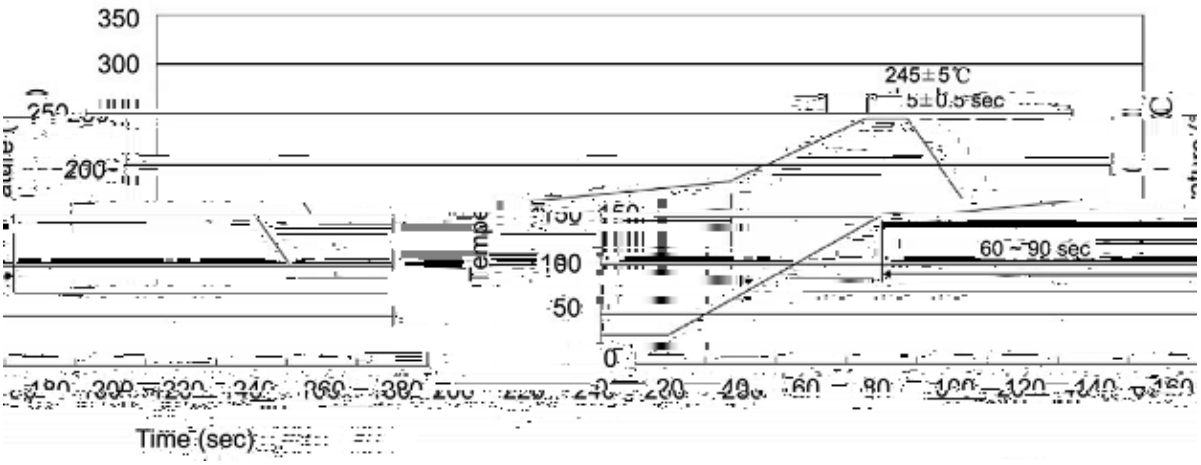

				Note:	
1	150	180	60 90sec;	1.Preheating:150~180℃, Time:60~90sec.	
2	245±5		5±0.5sec;	2.Peak Temp.:245±5℃, Duration:5±0.5sec.	
3		2	10℃/sec.	3. Cooling Speed: 2~10℃/sec.	

h J i j k l m n

M

260±5℃	10±1 sec.	Temp.:260±5℃	Time:10±1 sec

o p q r

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm³)		
	只卷盘	卷盘盒	只盒	盒箱	只箱		盒	箱
SMA							336X40	380X335X366