/ Revised record

D	2017-5				
E	2021-1-27	4/7	e0.5-0.7 0.5-0.8 5 7		


0.8A MBF

Parameter	Symbol	Rating						Unit
		MB1F	MB2F	MB4F	MB6F	MB8F	MB10F	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	70	140	280	420	560	700	V
[redacted]070S								

/ Package Dimensions




/ Marking Instructions

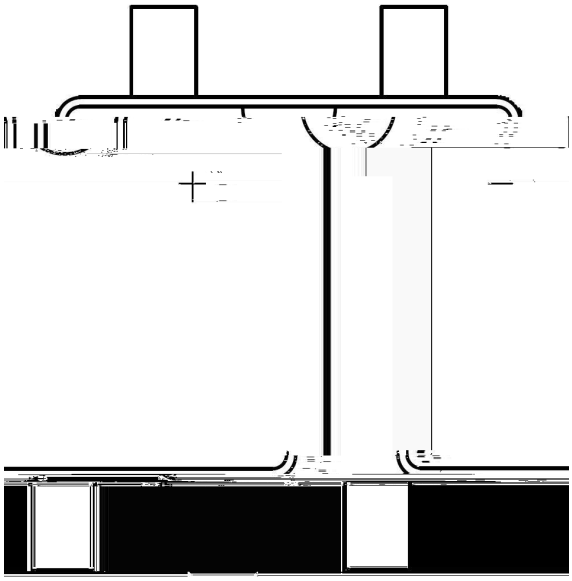

MB1F

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

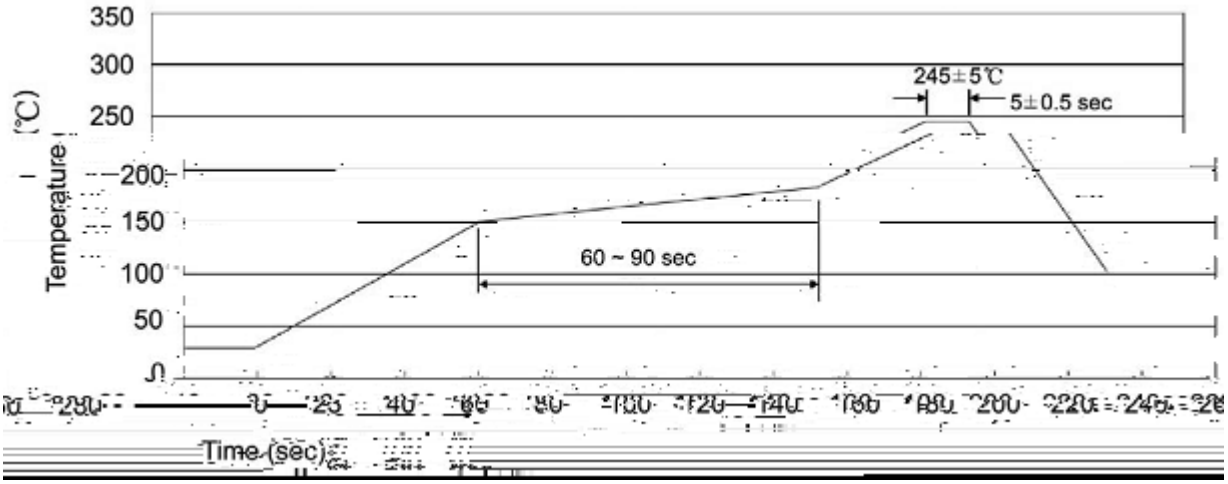

					Note:
1	25	150	60	90sec;	1.Preheating:25~150 , Time:60~90sec.
2	245±5			5±0.5sec;	