TO0263 Ṃ Ṃ Ŀ ʌ ồ Ỡ ᵻ⁀ ǁ ˥

v ˝Ǫ Parameter	˧ Symbol	˝Ǫ Ö Rating	D Ɉ Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	400	V
Maximum RMS voltage	V_{RMS}	280	V
Maximum DC blocking Voltage	V_{DC}	400	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	2x5	A
Peak Forward Surge Current,8.3ms			

ƒ Ã´E ¼ ƒ / Electrical Characteristic Curve

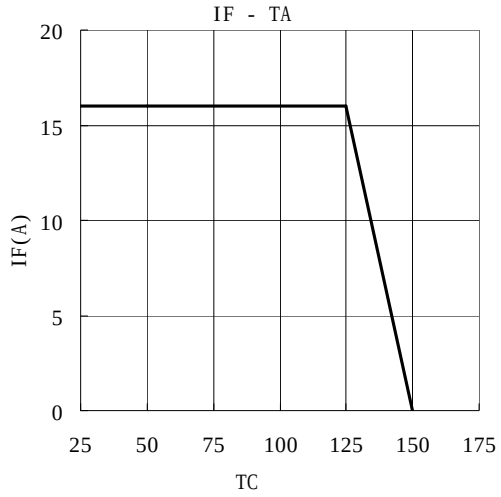

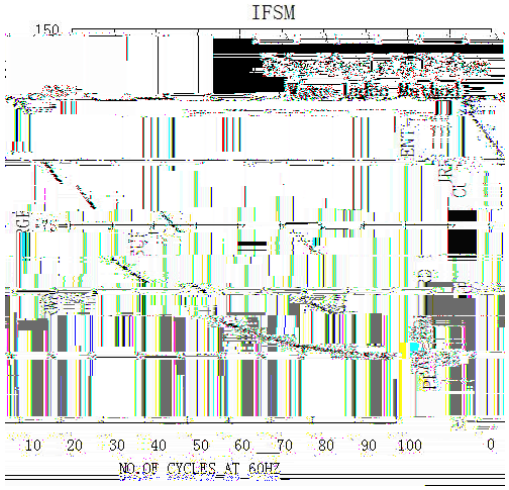

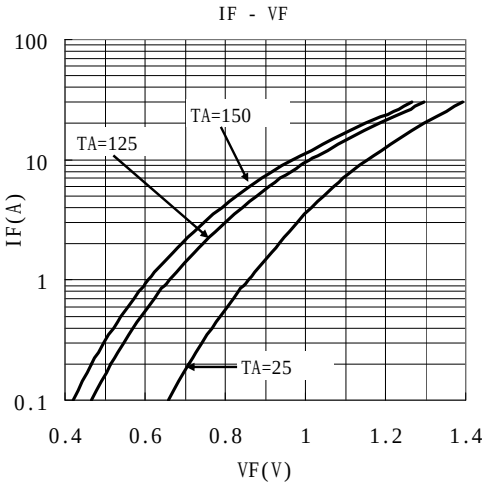

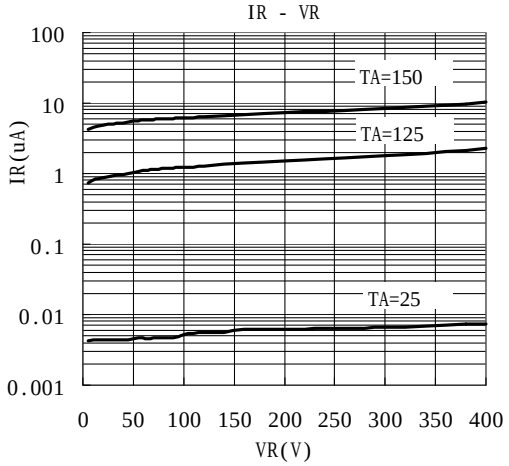

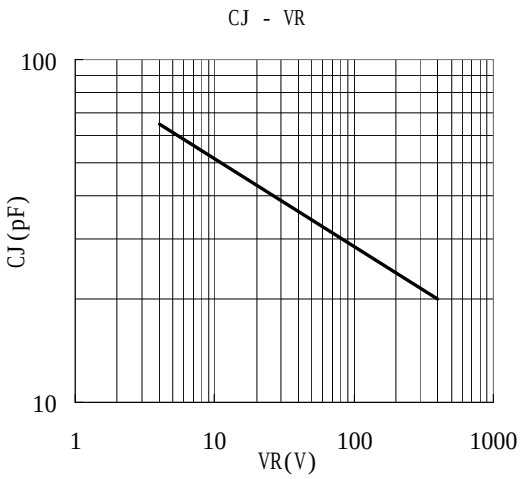

Ł. L˝Ω / Marking Instructions

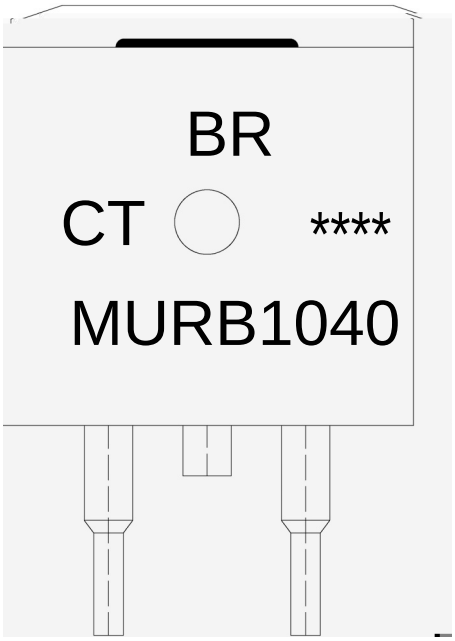

ب ˝ χ

BU χ	ѭ ʒ Ɱ
P UUB1040 χ	ѭ ɾ β ʒ
CT=	ѭ ɲ ˩ ‗
---- χ	ѭ ɨ ɾ ŋ̋ Ɱ ɩ ɨ ɾ ŋ̋ ψ ק

Note:

BR:	Company Code
MURB1040:	Product Type
CT:	Internal Structure
****:	Lot No. Code, code change with Lot No

ŧħ ʃ ╗ ẘ ´E ⅵ ƒ (ᾢ ᴗ̌) / Whp shudwxuh Suriloh iru LU Uhior z Vroghulqj+Se0luhh,

ب ˝ χ

1 ♬ □ ỷ 150 Ḱ 180 ɬ ı `H 60 Ḱ 90sec;

2 Š Ö □ ỷ 245 ° 5 ɬ ı `H ˙Y ⅄ ⅊ 5 ° 0.5sec;

3 ì ˙ ⅂ ˛ ɔ ɷ ỷ ⅊ 2 Ḱ 10 ɬ /sec.

Note:

1.Preheating:150~180 ɬ , Time:60~90sec.

2.Peak Temp.:245 ° 5 ɬ , Duration:5 ° 0.5sec.

3. Cooling Speed: 2~10 ɬ /sec.

⅃ ǜ q ˝ `Y Ţ / Resistance to Soldering Heat Test Conditions

□ ỷ χ 260 ° 5 ɬ `H χ 10 ° 1 sec. Temp.:260±5 Time:10±1 sec