Rev.B Feb.-2021

Parameter	Symbol	Rating							Unit
		RS3AC	RS3BC	RS3DC	RS3GC	RS3JC	RS3KC	RS3MC	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum A	um A		u	m	n				

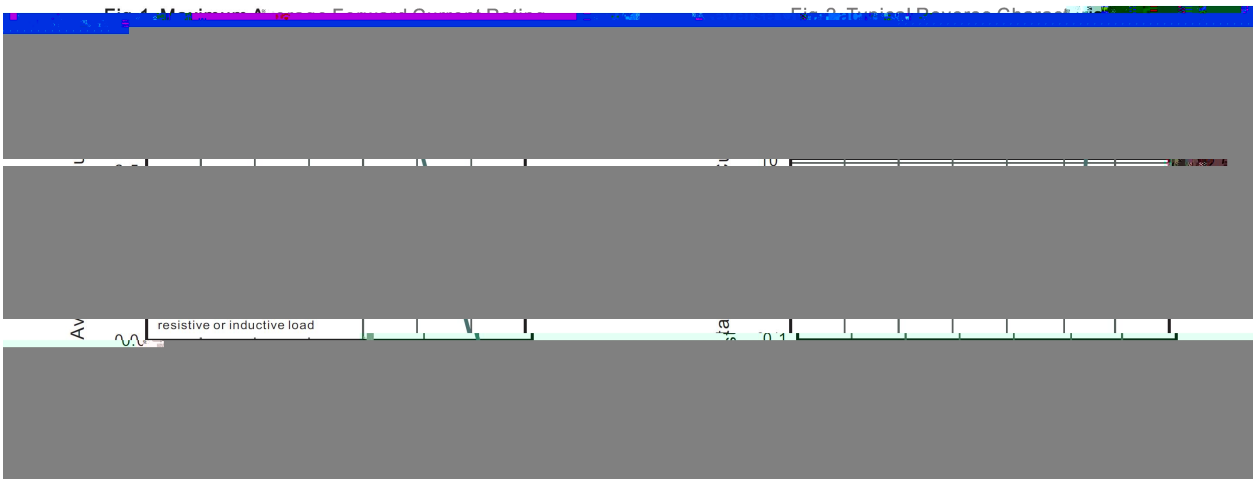
resistive or inductive load

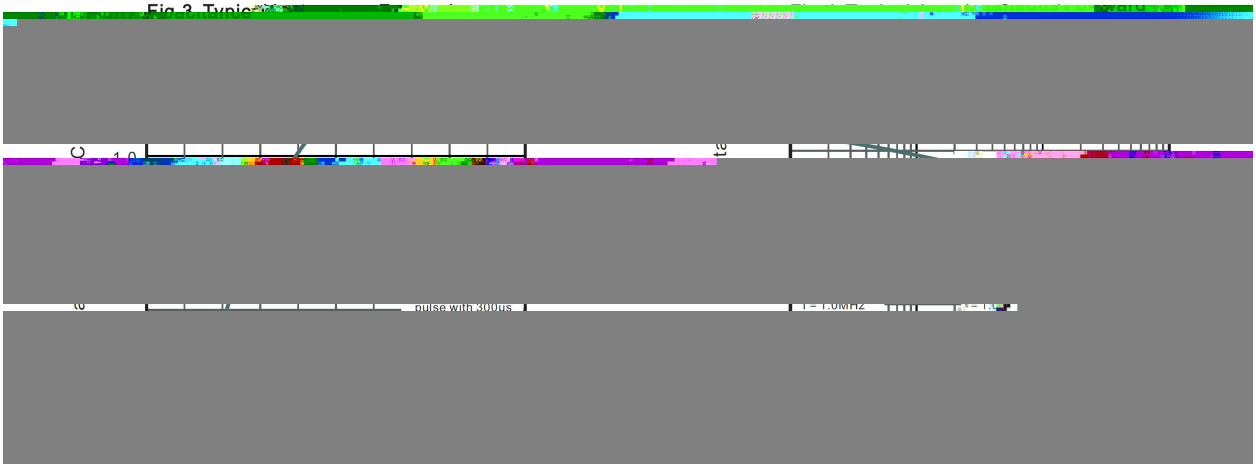
pulse with 300μs

Marking



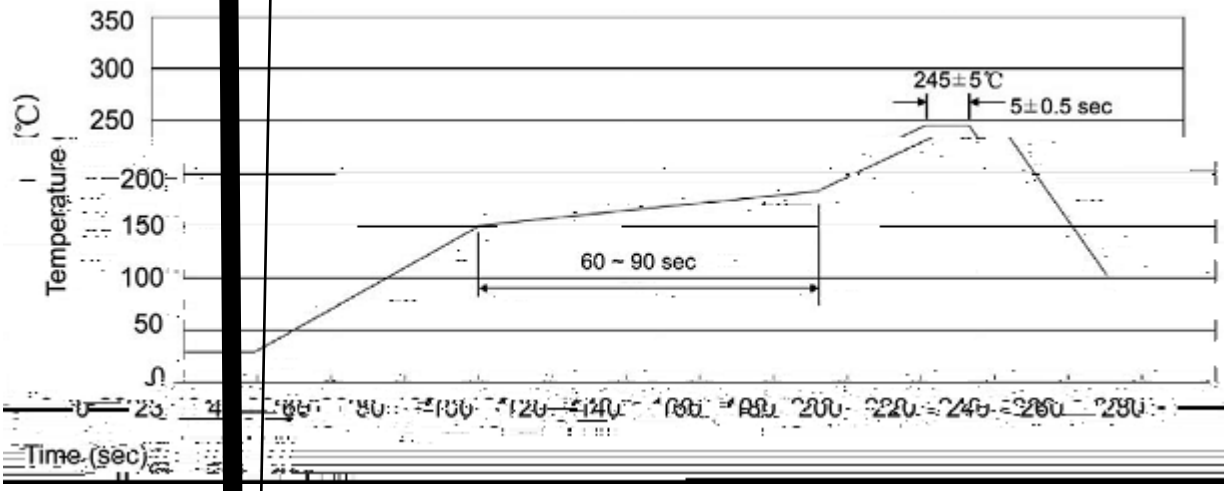

Note:

1 25 50 60 90sec;

1.Preheating:25~150℃, Time:60~90sec.

2 245±5 5±0.5sec;

2.Peak Temp.:245±5℃, Duration:5±0.5sec.

3 2 10℃/sec.

3. Cooling Speed: 2~10℃/sec.

260±5℃ 10±1 sec. Temp.:260±5℃ Time:10±1 sec

/ REEL

Package Type	Units					Dimension		(unit mm^3)
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box