"Yت

SOT-323 NPN Silicon NPN transistor in a SOT-323 Plastic Package.

◕ È

S8550W

Complementary pair with S8550W.

ข ي

Power amplifier applications.

Ɲ ڤ ̃ ą̃ ≠ ع



ã ⅄ ʊ̃



PIN1 Emitter PIN 2 Base PIN 3 Collector

ɬ. ʜ ɔ̀

h_{FE} Classifications Symbol	B	C	D
h_{FE} Range	85 160	120 200	160 300
Marking	HY3B	HY3C	HY3D

ᵘ ĖÒĻ ʃ

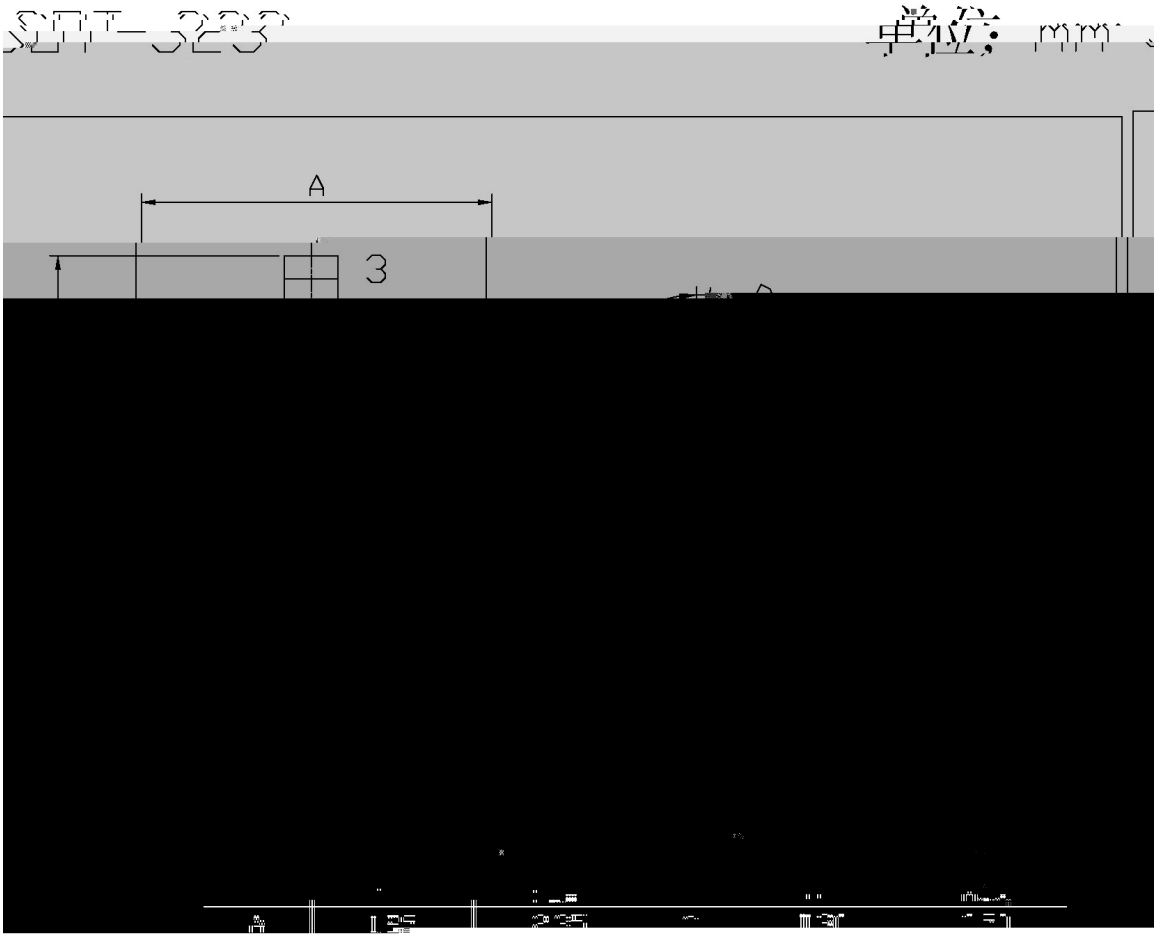

ŧĥ ʃ ╗ ẘ ´E ⅵ ʃ ᾠ ᾶ Wh p shudwxuh Suriloh iru LU Uhior z Vroghulqj+Se0luhh,

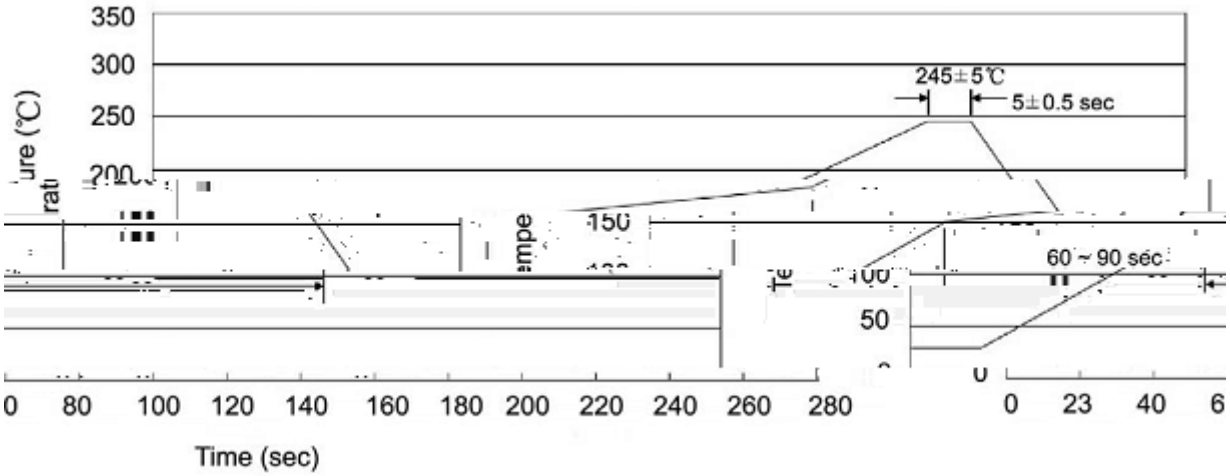

Note:

1 25 150 60 90sec;

2 245±5 5±0.5sec;

3 2 10 /sec.

1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:245±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

⅃ ϋ q ˉ ˋY Ţ

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

ɒ ᴇ ᐸ—

/ REEL

Package Type	Units					Dimension (unit mm³)		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOT-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

ä ɤ ʅ ̈Ω