/ Descriptions

50V~1000V 2.0A SMB

/ Features

RoHS 2011/65/EU

/ Applications

.

/ Equivalent Circuit

/ Pinning

PIN	DESCRIPTION
1	Cathode
node	2 Ai

/ Marking

/ Absolute Maximum Ratings(Ta=25)

US2AB~US2MB

DATA SHEET

US2AB~US2MB

/ Marking Instructions

/ Marking Instructions

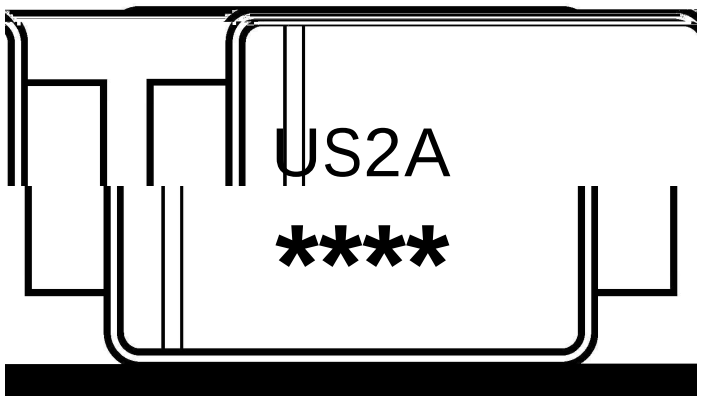

US2A

**** 1 * 3 *

US2A

**** * *

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

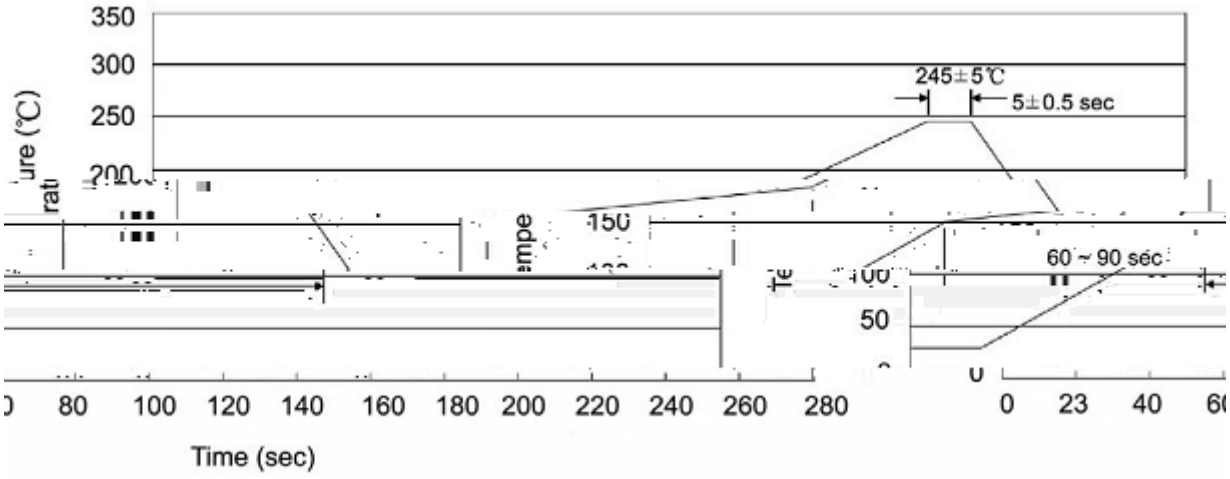

/